

## AXOR One

Thermostatic module for concealed installation for 1 function

Surfaces: **Chrome** Article Number: **45711000**



### Description

#### product features

- Eco-Function: flow rate regulation via lever handle
- depending on volume flow and installation situation approx. 50% flow rate reduction
- 1 function and 1 additional outlet
- comfortable turning on / off of consumers with large Select-paddle
- maximum flow rate at 0.3 MPa: 24 l/min
- flow rate per outlet: 24 l/min
- thermostat cartridge, Select valve, ceramic valves 90°
- min. operating pressure: 1 bar
- safety lock at 40° C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- non-return valve
- connection type: basic set
- Thermostat is delivered with button hand shower

### Technology



### Design awards




reddot award 2016  
winner

### Product image



### Scale drawing

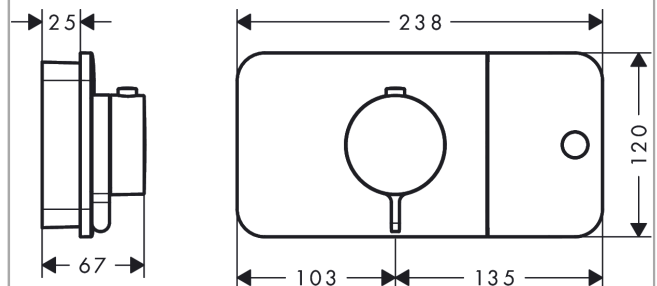

## AXOR One

Thermostatic module for concealed installation for 1 function

Surfaces: **Chrome** Article Number: **45711000**



### Flowchart

