

AXOR One

Thermostatic module for concealed installation for 2 functions

Surfaces: **Chrome** Article Number: **45712000**



Description

product features

- Eco-Function: flow rate regulation via lever handle
- depending on volume flow and installation situation approx. 50% flow rate reduction
- 2 functions and 1 additional outlet
- simultaneous use of several outlets
- comfortable turning on / off of consumers with large Select-paddle
- flow rate per outlet: 24 l/min
- flow rate by simultaneous use of all outlets: 30 l/min
- thermostat cartridge, Select valve, ceramic valves 90°
- min. operating pressure: 1 bar
- safety lock at 40° C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- non-return valve
- connection type: basic set

Technology



Design awards




reddot award 2016
winner

Product image



Scale drawing

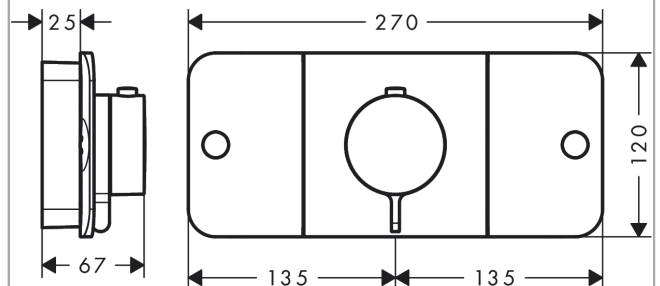

AXOR One

Thermostatic module for concealed installation for 2 functions

Surfaces: **Chrome** Article Number: **45712000**



Flowchart

