

ShowerSelect

Thermostat for concealed installation for 2 functions with hose connection and shower holder

Surfaces: **Chrome** Article Number: **15765000**



Description

product features

- consists of: Thermostat, shower holder
- 2 outlets
- simultaneous use of several outlets
- Select push-button on/off control for 2 outlets
- flow rate hand shower connection at 0.3 MPa: 14 l/min
- flow rate upper outlet: 29 l/min
- thermostat cartridge, Select valve
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety lock at 40° C
- temperature limitation adjustable
- hose nut: for shower hoses with conical nut on both sides
- connection type: basic set
- Thermostat is delivered with buttons hand shower and Rain large

Technology



Design awards



reddot award 2014
winner




DESIGN
AWARD
2015

Product image



Scale drawing

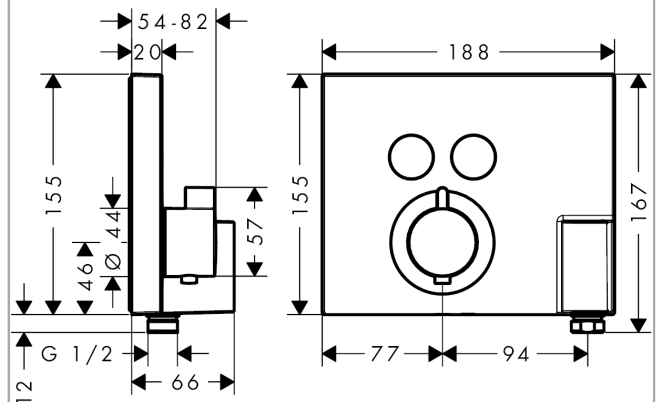

ShowerSelect

Thermostat for concealed installation for 2 functions with hose connection and shower holder

Surfaces: **Chrome** Article Number: **15765000**



Flowchart

