

**AXOR Massaud**  
**Thermostat for concealed installation with shut-off valve**  
Surfaces: **Chrome** Article Number: **18745000**



## Description

### product features

- 1 outlet
- flow rate at 3 bar: 26 l/min
- thermostat cartridge, ceramic valves 90°
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety lock at 38° C
- temperature limitation adjustable
- non-return valve
- with silencer
- connection type: basic set
- PA-IX 9711/ID
- ETA VA 1.43/18753
- ACS 19 ACC LY 234, valide jusqu'au 05.11.2023
- MCA 1300008/M1
- TMV3 BC1365/0314
- Kiwa K11292\_Thermostatic mixers
- SVGW 0411-4902
- SINTEF 3088
- TMV2 BC1364/0314
- TMV 2 Kiwa UK


**AXOR Massaud**  
**Thermostat for concealed installation with shut-off valve**  
 Surfaces: **Chrome** Article Number: **18745000**




## Product image



## Scale drawing

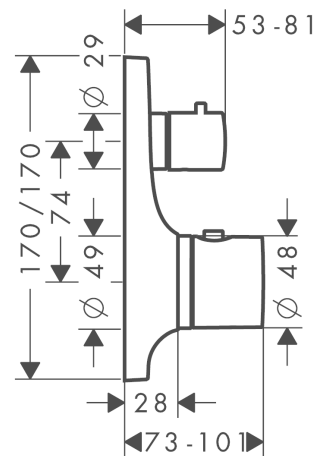

## Flowchart

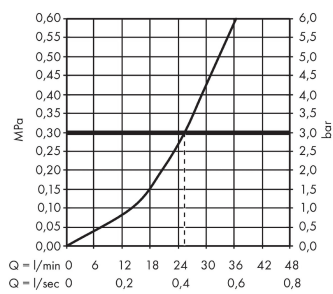


**AXOR Massaud**  
**Thermostat for concealed installation with shut-off valve**  
 Surfaces: **Chrome** Article Number: **18745000**



## Exploded Drawing

Year of production: >05/11

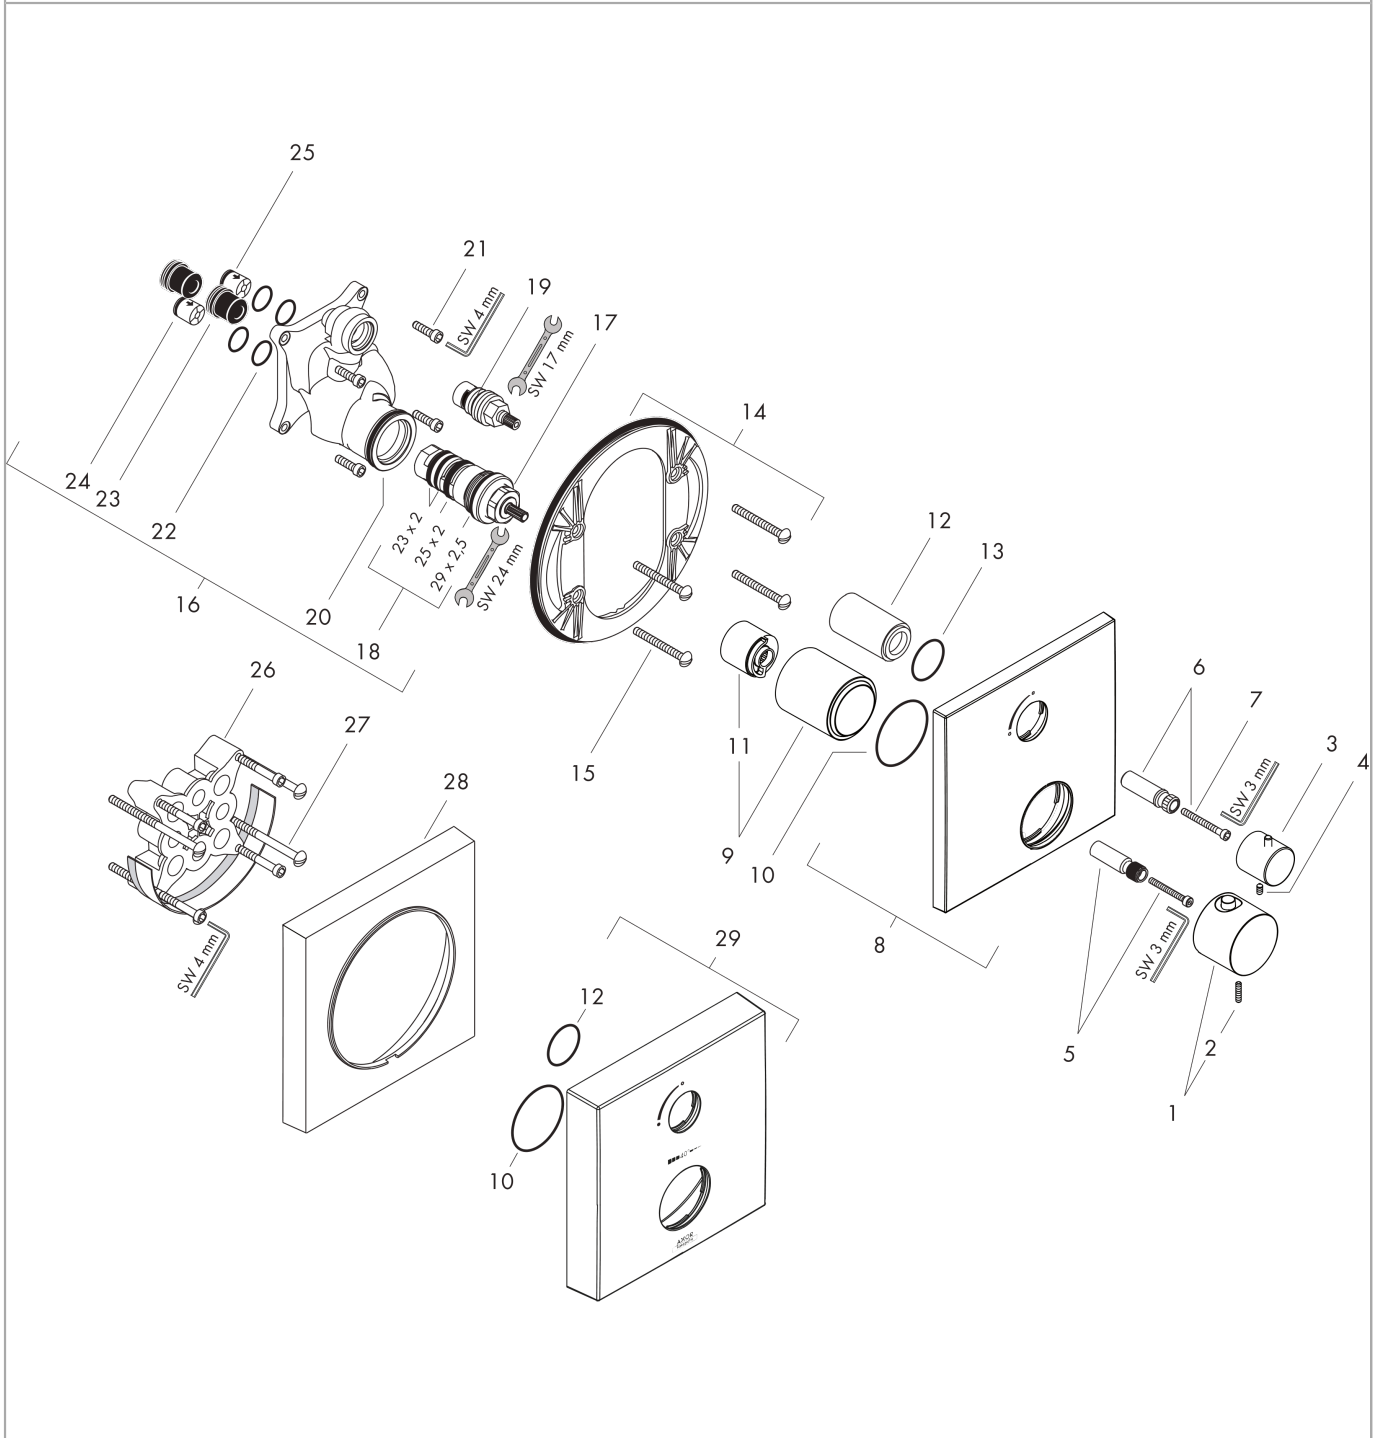

**AXOR Massaud**  
**Thermostat for concealed installation with shut-off valve**  
 Surfaces: **Chrome** Article Number: **18745000**



## Spare part list

Year of production: >05/11

Pos.	Description	Article Number	PC	PU
1	handle for thermostat	18097000	13	1
2	hollow set screw M4x16	97663000	1	1
3	handle	96520000	11	1
4	hollow set screw M4x8	97669000	1	1
5	adapter for handle	96451000	5	1
6	adapter for handle	98701000	3	1
7	hexagon socket screw M4x35	92160000	1	1
8	escutcheon	98686000	13	1
9	sleeve	98734000	12	1
10	O-ring 48x5	98174000	1	1
11	safety set for temperature control	97334000	4	1
12	sleeve	96446000	8	1
13	O-ring 30x5	98153000	1	1
14	holder for escutcheon	98793000	9	1
15	set of fixing screws	96454000	3	1
16	installation unit cpl.	92760000	18	1
17	thermostat cartridge	94282000	15	1
18	sealing set	95037000	10	1
19	shut off unit right closing	94009000	9	1
20	O-ring 39x2	98158000	1	1
21	set of screws	96525000	3	1
22	O-ring 16x2	98133000	1	1
23	noise reduction	94073000	7	1
24	non return valve (pressure-resistant up to 2 MPa)	92594000	5	1
25	set of non return valves DW 15	94074000	5	1
26	extension 25 mm	13595000	98	1
27	set of fixing screws	97747000	1	1
28	extension 22 mm	97407000	98	1
29	escutcheon height = 33 mm (when wall is not deep enough).	14970000	98	1
a	concealed item	01800180	98	1
b	adapter for exchanged connections	93181000	18	1
c	non return valve with filter	92499000	5	1